

THUNDER ELITE

TE604 - 600 WATT 4-CHANNEL THUNDER ELITE AMPLIFIER





MTX WARRANTY STATEMENT

MTX Thunder Elite amplifiers purchased in the USA from an authorized MTX dealer are guaranteed against defects in material and workmanship for the period of 3 years if installed by an authorized MTX dealer (1 year if by customer). The warranty period begins the day the product is purchased by the end user. This warranty is limited to the original retail purchaser of product. Product found to be defective during that period will be repaired or replaced by MTX at no charge. This warranty is void if it is determined that unauthorized parties have attempted repairs or alterations of any nature. Warranty does not extend to cosmetics or finish. Before presuming a defect is present in the product, be certain that all related equipment and wiring is functioning properly. MTX disclaims any liability for other incurred damages resulting from product defects. Any expenses in the removal and reinstallation of products are not covered by this warranty. MTX's total liability will not exceed the purchase price of the product. If a defect is present, your authorized MTX dealer may be able to effect repairs.

Proof of purchase is required when requesting service, so please retain your sales receipt, and take a moment to register your product online at MTX.com. Also, a Return Authorization number (RA) is required before shipping product back to MTX, call 800-225-5689 or 602-438-4545, for amplifier RAs.

GAIN CONTROL

INPUT SENS
x1 x10

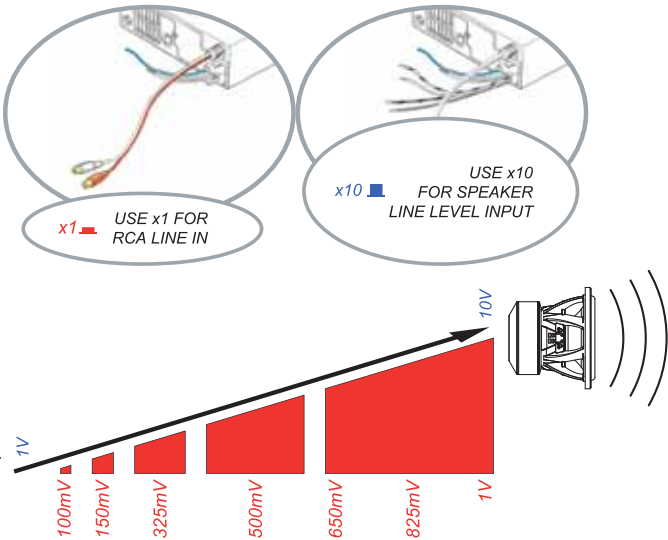

MTX PRIZM EFX

PRIZM COLOR

THUNDER THUNDER THUNDER THUNDER THUNDER THUNDER

OFF

EFX ON / OFF (HOLD = DEMO)

PUSH ON THUNDER

PUSH OFF THUNDER

HOLD FOR DEMO THUNDER

NOTE: Demo mode is usable with the amplifier on or off, and will draw current until turned off manually.

SIGNAL ROUTING

2CH 4CH

MONO OUT ON OFF

≥2Ω

FRONT CHANNEL

X-OVER ON OFF

H-PASS FREQ 40Hz 350Hz

40 Hz 45 Hz 70 Hz 140 Hz 180 Hz 270 Hz 350 Hz

12dB/Oct 12dB/Oct

REAR CHANNEL

X-OVER ON OFF

L-PASS H-PASS

H-PASS FREQ 40Hz 350Hz

L-PASS FREQ 40Hz 350Hz

40 Hz 50 Hz 60 Hz 130 Hz 170Hz 300 Hz 350 Hz

24dB/oct 24dB/oct

12dB/Oct 12dB/Oct

FOR DETAILED INSTALLATION INSTRUCTIONS VISIT MTX.COM
FOR TECHNICAL ASSISTANCE CALL 1-800-CALL-MTX

THUNDER® · JACKHAMMER™ · AXE · SLEDGEHAMMER™ · THUNDERFORM®
AMPLIFIERS · SUBWOOFERS · SPEAKERS · ENCLOSURES · MARINE

