


# THUNDER ELITE

TE801D – 800 WATT MONO-BLOCK, CLASS D, THUNDER ELITE AMPLIFIER

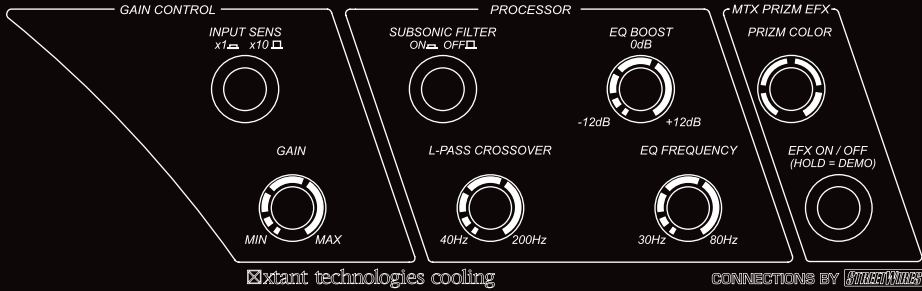

## MTX PRIZM EFX

THUNDER THUNDER THUNDER THUNDER THUNDER THUNDER THUNDER

PRIZM COLOR

EFX ON / OFF (HOLD = DEMO)

PUSH ON THUNDER

PUSH OFF THUNDER

HOLD FOR DEMO THUNDER

NOTE: Demo mode is usable with the amplifier on or off, and will draw current until turned off manually.

### MTX WARRANTY STATEMENT

MTX Thunder Elite amplifiers purchased in the USA from an authorized MTX dealer are guaranteed against defects in material and workmanship for the period of 3 years if installed by an authorized MTX dealer (1 year if by customer). The warranty period begins the day the product is purchased by the end user. This warranty is limited to the original retail purchaser of product. Product found to be defective during that period will be repaired or replaced by MTX at no charge. This warranty is void if it is determined that unauthorized parties have attempted repairs or alterations of any nature. Warranty does not extend to cosmetics or finish. Before presuming a defect is present in the product, be certain that all related equipment and wiring is functioning properly. MTX disclaims any liability for other incurred damages resulting from product defects. Any expenses in the removal and reinstallation of products are not covered by this warranty. MTX's total liability will not exceed the purchase price of the product. If a defect is present, your authorized MTX dealer may be able to effect repairs.

Proof of purchase is required when requesting service, so please retain your sales receipt, and take a moment to register your product online at MTX.com. Also, a Return Authorization number (RA) is required before shipping product back to MTX, call 800-225-5689 or 602-438-4545, for amplifier RAs.

## GAIN CONTROL

INPUT SENS: x1 (red), x10 (blue)

GAIN: MIN to MAX

USE x1 FOR RCA LINE IN

USE x10 FOR SPEAKER LINE LEVEL INPUT

10V

1V

100mV, 150mV, 325mV, 500mV, 650mV, 825mV

## PROCESSOR

SUBSONIC FILTER: ON (red), OFF (black)

12dB/oct.

30Hz

40 Hz, 55 Hz, 75 Hz, 120 Hz, 150 Hz, 180 Hz, 200 Hz

24dB/oct.

L-PASS CROSSOVER: 40Hz, 200Hz

QUASI PARAMETRIC EQ: 0dB, -12dB, +12dB, +8dB, +6dB, +4dB, 0dB, -6dB, -10dB, -12dB

EQ FREQUENCY: 30Hz, 35Hz, 45Hz, 60Hz, 70Hz, 75Hz, 80Hz

FOR DETAILED INSTALLATION INSTRUCTIONS VISIT [MTX.COM](http://MTX.COM)  
FOR TECHNICAL ASSISTANCE CALL 1-800-CALL-MTX

THUNDER® · JACKHAMMER™ · AXE · SLEDGEHAMMER™ · THUNDERFORM®  
AMPLIFIERS · SUBWOOFERS · SPEAKERS · ENCLOSURES · MARINE **MTX AUDIO**