


ROADTHUNDER®


Wiring Configuration

La Configuración del alambrado, La Configuración del alambrado, Verdrahtende Konfiguration




With coils wired in parallel (Con rollos alambró en la paralela, Avec les bobines télégraphiées dans l'analogie, Mit Windungen hat parallel verdrahtet):

A dual 4Ω speaker will represent a 2Ω load. (Un doble 4Ω orador representará una carga 2Ω, Un double 4Ω haut-parleur représentera un 2Ω chargent, Ein doppelte 4Ω Sprecher beladen eine 2Ω wird vertreten)

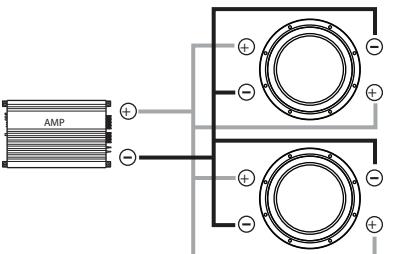

With coils and speakers wired in parallel (Con rollos y oradores alambró en la paralela, Avec les bobines et les haut-parleurs à télégraphiées dans l'analogie, Mit Windungen und Sprecher haben parallel verdrahtet):

Two dual 4Ω speaker will represent a 1Ω load. (Dos doble 4Ω orador representará una carga 1Ω, Deux double 4Ω haut-parleur représentera un 1Ω chargent, Zwei doppelte 4Ω Sprecher wird eine 1Ω last vertreten)

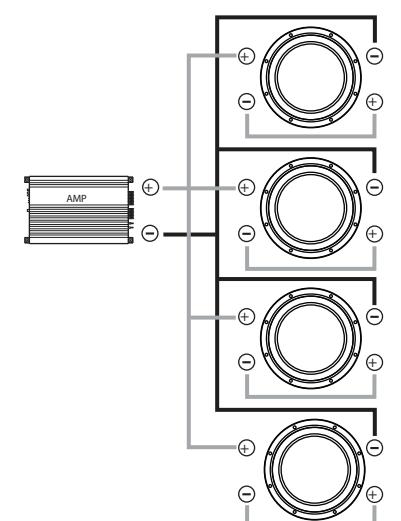

With coils wired in series and speakers wired in parallel (Con rollos alambró en la serie y oradores alambró en paralela, Avec les bobines télégraphiées dans le feuilleton et les haut-parleurs a analogie, Mit Windungen die in serie verdrahtet werden, und Sprecher haben parallel verdrahtet):

Four dual 4Ω speaker will represent a 2Ω load. (Cuatro doble 4Ω orador representará un 2Ω cargar, Quatre double 4Ω haut-parleur représentera un 2Ω chargent, Vier doppelter 4Ω Sprecher beladen eine 2Ω wird vertreten)

RTS12-44


MTX

AUDIO

Parameters



Los parámetros, Paramètres, Parameter

Fs: 33.2 Hz
Qms: 2.940
Cms: 0.163 mm/N
Mms: 140.9 g
Rms: 9.988 kg/s
Vas: 2.130 ft³ (60.3 liters)
Xmax: 0.46 in (10.67 mm)
D: 10.11 in (256.8 mm)
Sd: 80.28 in² (517.9 cm²)
Vd: 36.93 in³ (0.545 liters)
Qes: 0.762
Re: 2.10 Ω
Bl: 9.00 Tm
Prms: 250 Watts
Qts: 0.605
η₀: 0.278%
SPL 2.83V/1m: 92.7 dB

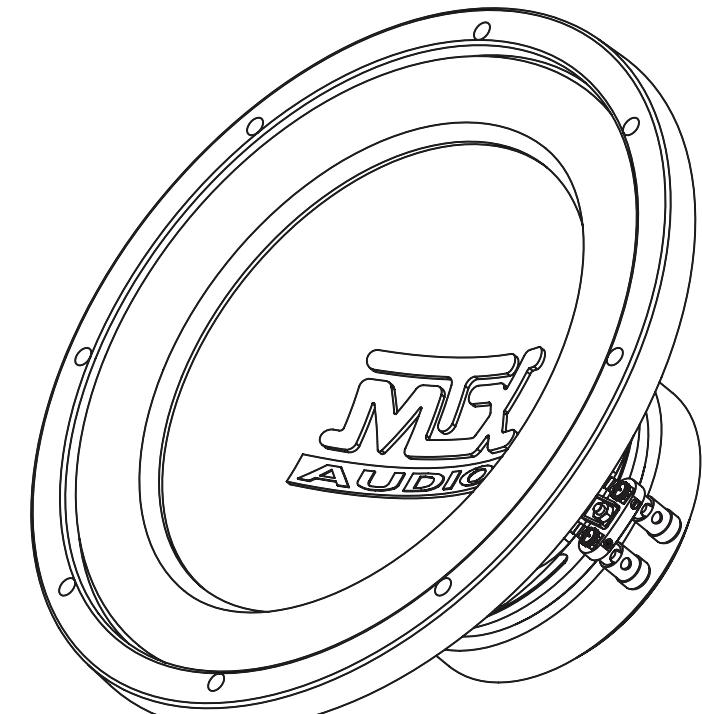

Specifications

Las especificaciones, Specifications, Spezifikationen

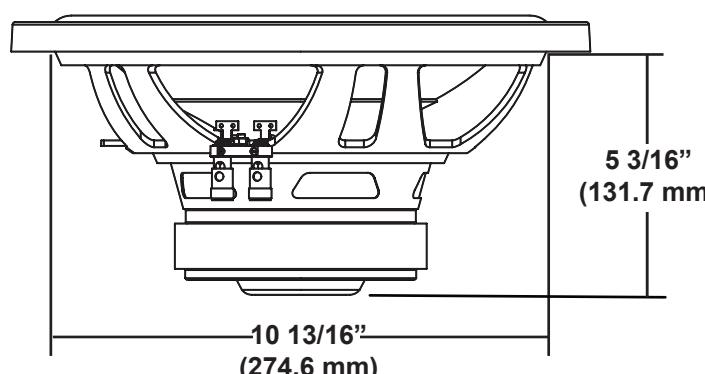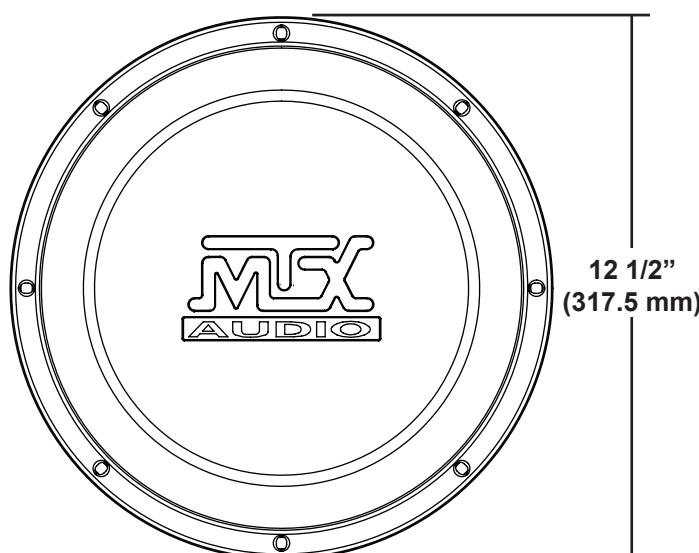

Recommended Power Rating of 125 - 250 Watts RMS





La Potencia nominal recomendada, Le Pouvoir recommandé Evaluant, Empfohlene Kraft Einzuschätzen

ROADTHUNDER®**RTS12-44**


Sealed Enclosure

El Cerclo sellado, Clôture scellée, Abgedichtete Einschließung


For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.

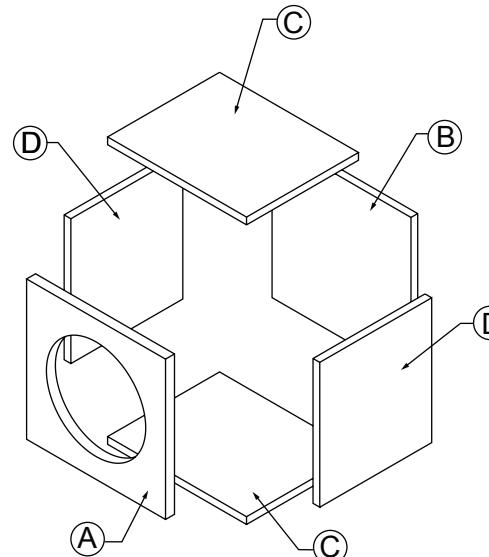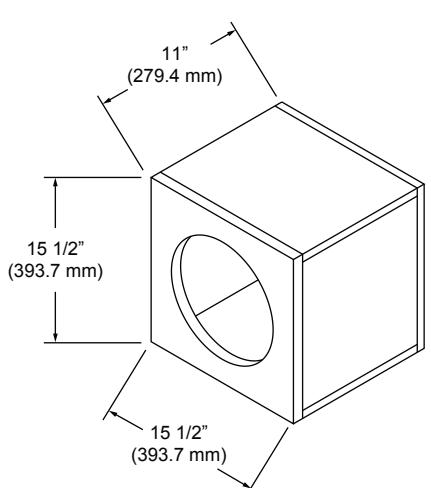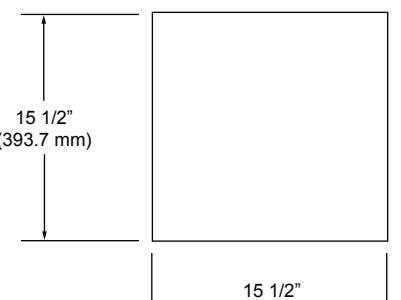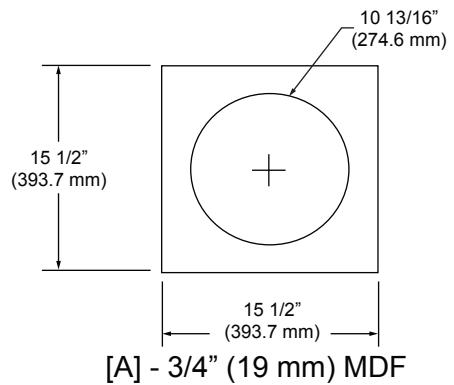Net Internal Volume: 1.00 ft³

[B] - 3/4" (19 mm) MDF

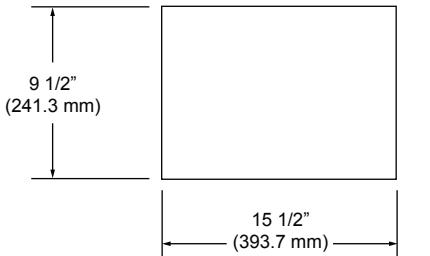

[C] - 3/4" (19 mm) MDF

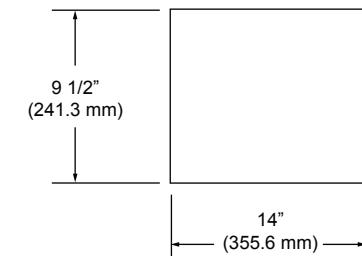



[D] - 3/4" (19 mm) MDF

ROADTHUNDER®**RTS12-44**


Vented Enclosure

Descargar Cerco, Clôture donnere vent, Vented Einschließung


For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.

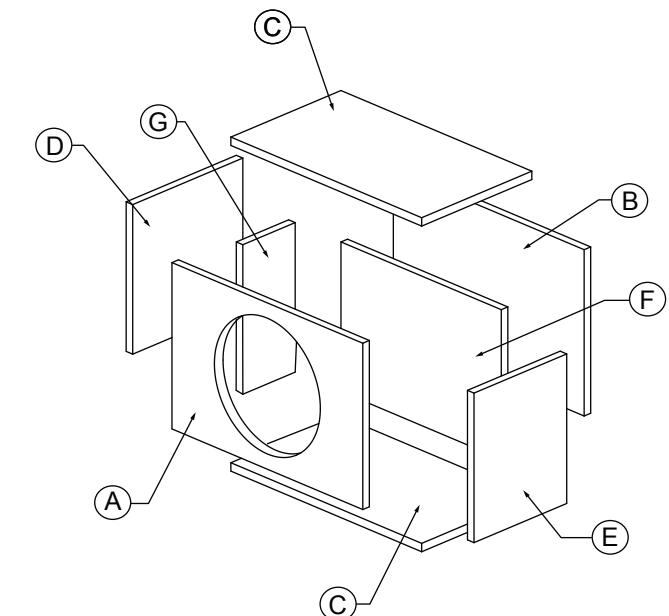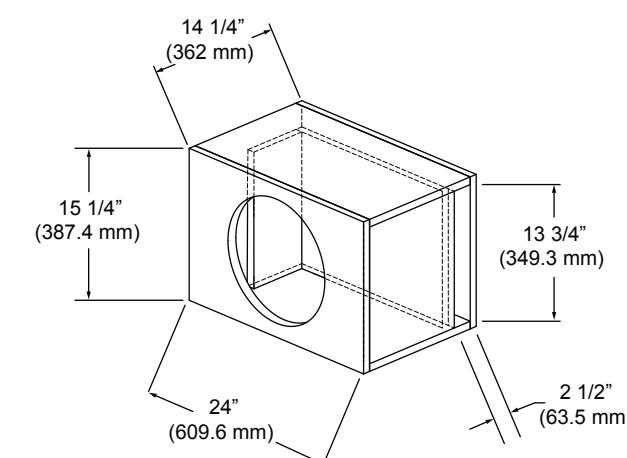Net Internal Volume: 2.32 ft³


Parts List

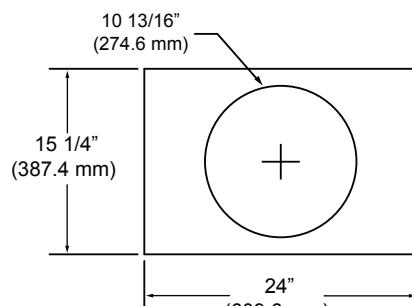La Lisat de partes, Liste de parties, Ersatzteilliste


[A] - 3/4" (19 mm) MDF

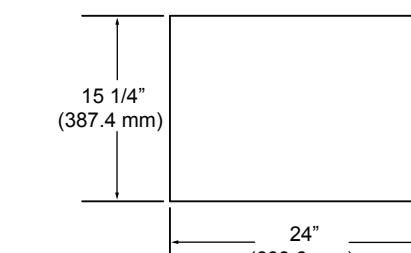


[B] - 3/4" (19 mm) MDF

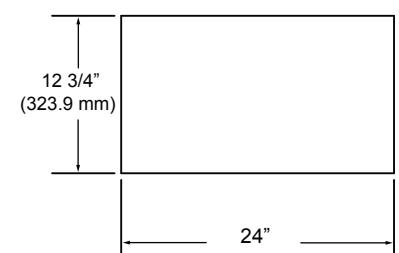


[C] - 3/4" (19 mm) MDF




[D] - 3/4" (19 mm) MDF



[E] - 3/4" (19 mm) MDF



[F] - 3/4" (19 mm) MDF



[G] - 3/4" (19 mm) MDF