


mtx audio THUNDER 45 TR4510-44


Wiring Configuration

La Configuración de los altavoces, La Configuración der Lautsprecher, Verbindende Konfiguration




Wired Direct (Alimentar Directo, Telegraphieren Direct, Direct verdrahtet):
A 4Ω speaker will represent a 4Ω load.

(Un orador 4Ω representará una carga 4Ω. Un 4ΩHautparleur représentera un 4Ω chargé.) (Ein 4Ω-Sprecher belastet eine 4Ω-Lastvernetz.)




Two Speakers wired in parallel (Dos Cuadrados alimentados en paralelo, Deux Haut-Parleurs en parallèle sans charge, Zwei Sprecher nebeneinander verbunden):
A 4Ω speaker will represent a 2Ω load.

(Un orador 4Ω representará una carga 2Ω. Un 4ΩHautparleur représentera un 2Ω chargé.) (Ein 4Ω-Sprecher belastet eine 2Ω-Lastvernetz.)



Four Speakers wired in parallel (Cuatro Cuadrados alimentados en paralelo, Quatre Haut-Parleurs en parallèle sans charge, Vier Sprecher nebeneinander verbunden):
A 4Ω speaker will represent a 1Ω load.

(Un orador 4Ω representará una carga 1Ω. Un 4ΩHautparleur représentera un 1Ω chargé.) (Ein 4Ω-Sprecher belastet eine 1Ω-Lastvernetz.)



Three Speakers wired in parallel (Tres Cuadrados alimentados en paralelo, Trois Haut-Parleurs en parallèle sans charge, Drei Sprecher nebeneinander verbunden):
A 4Ω speaker will represent a 1.33Ω load.

(Un orador 4Ω representará una carga 1.33Ω. Un 4ΩHautparleur représentera un 1.33Ω chargé.) (Ein 4Ω-Sprecher belastet eine 1.33Ω-Lastvernetz.)



MTX products purchased in the USA from an authorized MTX dealer are guaranteed against defects in material and workmanship for a period of 1 year, the warranty period begins the day the product is purchased by the end user. This warranty is limited to the original retail purchaser of product. Product found to be defective during this period will be repaired or replaced by MTX at no charge. This warranty is void if it is determined that unauthorized parties have attempted repairs or alterations of any nature. Warranty does not extend to corrosion or finish. Before purchasing a defect is present in the product, be certain that all related equipment and wiring is functioning properly. MTX disclaims any liability for other damage resulting from product misuse. Any expenses for the installation or relocation of products are not covered by this warranty. MTX's best liability will not exceed the purchase price of the product. If a defect is present, your authorized MTX dealer may be able to offer repairs.


Proof of purchase is required when requesting service, so please retain your sales receipt, and take a moment to register your product on line at MTX.com. Also, a Return Authorization number (RA) is required before shipping product back to MTX, call 800-656-2666 or 606-325-6566 for speaker RA's.

mtx audio THUNDER 45 TR4510-44

Parameters


Los parámetros, Paramètres, Parameter

- F₀: 42.30 Hz
- Q_{ms}: 5.29
- C_{ms}: 0.135 mmHn
- M_{ms}: 104.40 g
- R_{ms}: 5.26 kg/s
- V₀: 970 ft³ (27.47 liters)
- X_{max}: 0.371 in (9.42 mm)
- D: 8.661 in (220.00 mm)
- S_d: 56.92 in² (360.13 cm²)
- V_d: 21.80 in³ (0.36 liters)
- Q_{es}: 0.86
- R_e: 1.85 Ω
- B₁: 7.73 Tm
- F₃: 200 Watts
- Q_{ts}: 0.740
- η₀: 0.233 %
- SPL₀: 85.80 dB
- SPL₁: 283W/1m: 92.10 dB

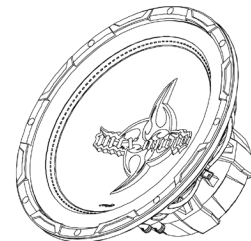

Specifications

Las especificaciones, Specifications, Spezifikationen

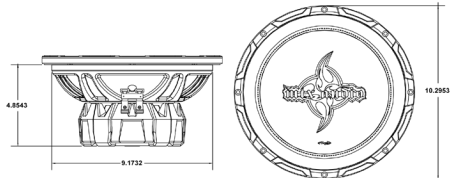

Recommended Power Rating of 100 - 200 Watts RMS

La Potencia nominal recomendada, Le Pouvoir recommandé Évalué, Empfohlene Kraft-Einleistungszahl


THUNDER™ JACKMANN™ AXE™ SLASHMANN™ TURBOFUNK™
AMPLIFIERS • SUBWOOFERS • SPEAKERS • ENCLOSURES • MARINE

mtx audio THUNDER 45 TR4510-44

Sealed Enclosure

El Cerrco sellado, Clôture scellée, Abgeschlossene Encloshung

For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.

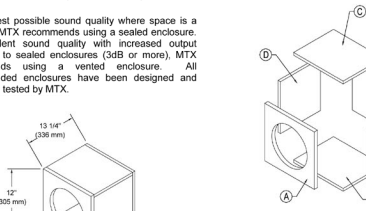


Net Internal Volume: 0.75 ft³

mtx audio THUNDER 45 TR4510-44

Vented Enclosure

Descargor Cerrco, Clôture dérivée vent, Ventil Encloshung


For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.



Net Internal Volume: 1.45 ft³

Parts List

La Lista de partes, Liste de parties, Ersatzliste

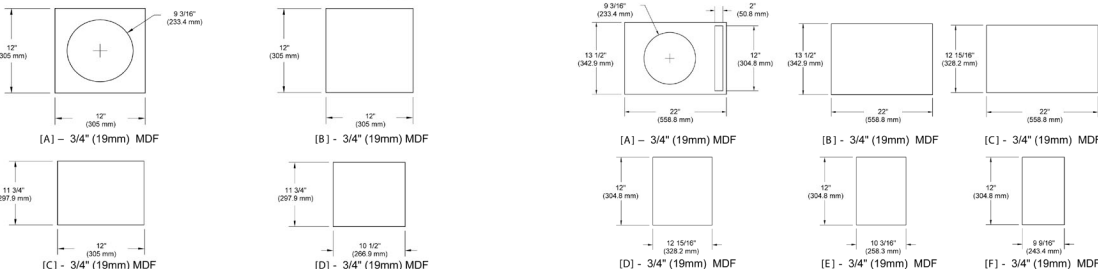

[A] - 3/4" (19mm) MDF [B] - 3/4" (19mm) MDF [C] - 3/4" (19mm) MDF [D] - 3/4" (19mm) MDF [E] - 3/4" (19mm) MDF [F] - 3/4" (19mm) MDF