

Wiring Configuration

La Configuración del alambrado. La Configuración del alambrado. Verdrahtende Konfiguration




Wired Direct. (Horsesh Direct. Teknisk Direkt. Direkt mit verdrahtet.)

A 4C speaker will represent a 4Ω load.
(Un orador 4C representará una carga 4Ω. Un 4C/hoofd speaker representeert een 4Ω charger.)

Two Speakers wired in parallel. (Twee Oradores aalamboren in de parallel. Quatre Deux Haut parleurs ont été câblés dans l'arrangement. Deux Speaker haben parallel verdrahtet.)

A 4C speaker will represent a 2Ω load.
(Un orador 4C representará una carga 2Ω. Un 4C/hoofd speaker representeert een 2Ω charger.)

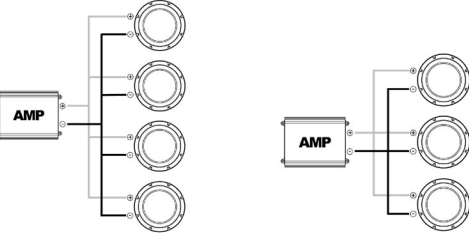

Four Speakers wired in parallel. (Cuatro Oradores aalamboren en la paralela. Quatre Haut parleurs ont été câblés dans l'arrangement. Vier Speaker haben parallel verdrahtet.)

A 4C speaker will represent a 1Ω load.
(Un orador 4C representará una carga 1Ω. Un 4C/hoofd speaker representeert een 1Ω charger.)

Three Speakers wired in parallel. (Tres Oradores aalamboren en la paralela. Trois Haut parleurs ont été câblés dans l'arrangement. Drei Speaker haben parallel verdrahtet.)

A 4C speaker will represent a 1.33Ω load.
(Un orador 4C representará una carga 1.33Ω. Un 4C/hoofd speaker representeert een 1.33Ω charger.)




MTX products purchased in the USA from an authorized MTX dealer are guaranteed against defects in material and workmanship for a period of one year, the warranty period begins the date the product is purchased by the end user. This warranty is limited to the original retail purchaser of product. Product found to be defective during that period will be repaired or replaced by MTX at no charge. This warranty is void if it is determined that qualified parties have assumed repairs or alterations of any nature. Repairing does not extend the warranty or finish. Before presenting a claim to present in the product, we require that all related equipment and wiring in functioning properly. MTX disclaims any liability for other incurred damages resulting from product defects. Any expense to the receiver or installation or products are not covered by this warranty. MTX's total liability will not exceed the purchase price of the product. If a defect in present, your authorized MTX dealer may be able to affect repair.

Proof of purchase is required when requesting service, please retain your sales receipt, and take a moment to register your product on line at MTX.com. Also, a Return Authorization number (RA) is required before shipping product back to MTX, call 800-896-2886 or 608-226-9560 for speaker RA's.


Sealed Enclosure

For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.



Parts List

La Liste de parts. Liste de partes. Ersatzteilliste

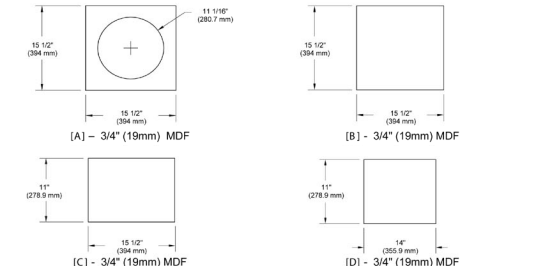

Parameters


Los parámetros. Paramètres. Parameter

- F₀: 32.20 Hz
- Qms: 6.57
- Cms: 0.131 mm/N
- Mms: 187.20 g
- Rms: 5.76 kPa
- Vas: 1.910 in³ (54.10 liters)
- Xmax: 0.530 in (13.46 mm)
- D: 10.375 in (263.52 mm)
- S_d: 84.54 in² (545.42 cm²)
- V_d: 44.81 in³ (0.73 liters)
- Qes: 0.59
- R_e: 1.60 Ω
- B₁: 9.38 Tm
- P_{ms}: 400 Watts
- Q_{ts}: 0.624
- η₀: 0.252 %
- SP₀: 86.20 dB
- SPL: 2.83V1m 93.21 dB



Specifications

Liste especificaciones. Specifications. Spezifikationen

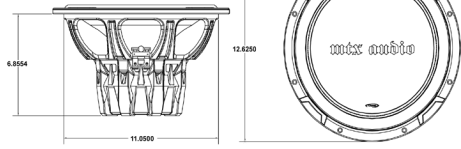

Recommended Power Rating of 200 - 400 Watts RMS


La Potencia nominal recomendada. Le Pouvoir recommandé. Empfohlene Kraft. Einschaltzähms



Vented Enclosure


Geocargat Cases. Gehäuse domnen vent. Vented Enclosure

For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.



Parts List

La Liste de parts. Liste de partes. Ersatzteilliste

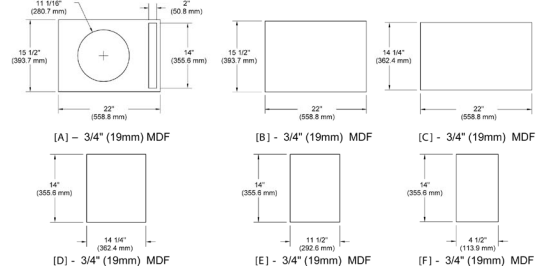

Para la mejor calidad de sonido posible donde el espacio es una prima, MTX recomienda utilizando un casco sellado. Para la calidad de sonido excelente con la producción aumentada comparo con carcasas selladas (3dB o más), MTX recomienda utilizando un casco ventilado. Todos carcasas recomendadas en este documento han sido probadas completamente por MTX. Para la mejor calidad de sonido posible donde el espacio es una prima, MTX recomienda utilizando un casco sellado. Para la calidad de sonido excelente con la producción aumentada comparo con carcasas selladas (3dB o más), MTX recomienda utilizando un casco ventilado. Todos carcasas recomendadas en este documento han sido probadas completamente por MTX. Für die beste mögliche Klangqualität, wo der Platz eine Prämie ist, empfiehlt MTX das Benutzen von einer abgedichteten Einheitsgehäuse. Für ausgezeichnete Klangqualität gegen über verschlossenen abgedichteten Einheitsgehäusen (3dB oder mehr), MTX schlägt das Benutzen von einer ventilierten Einheitsgehäuse empfohlen. Alle empfohlenen Einheitsgehäusen sind ausführlich getestet und sind gründlich durch MTX geprüft worden.